

Dealer Name : _____
 Dealer Contact : _____
 Client Name : _____
 Scripting Date: ____/____/____
 Ship To : _____

Dealer




Order N° _____ Quotation
 Date _____ Signature _____
 Customer Ref. _____ User's weight Kg _____

Funding: _____
 Email Quote To: **PAGE 1/2**
 2020, January

Key standard option

ALHENA

- L** Seat width 34 36 38 40 42 44 46
P Seat depth 34 36 38 40 42 44 46
HS Back-rest height 29 31 33 35 37 39 41
HA Front seat/floor height 42 43 44 46 48 50
HP Rear seat/floor height 38 40 42 44 46
DP Foot-rest/seat distance 33 35 37 39 41 43 45 47 cm

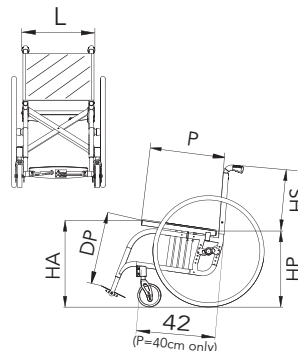

- Frame colour** ①
 Shiny titanium Glossy black
 Pearl white Natural titanium
 Neon green Neon orange

 (see "Colours" catalogue)

- Upholstery** ②
 Tension adjustable nylon back-rest
 Tens.adjustable breathable backrest
 Without backrest
 AMEKH custom postural backrest
 (fill up the proper order form)

- Upholstery colour** ③
 Black
 Coloured.....
 Available colours:
 NYLON: orange, red, green, cornflower blue, light blue;
 BREATHABLE: dry green, red, grey;

- Not detachable foot-rest** ④
 (with DP=43 cm and P=40 cm)
 (standard)

 84°
 16 cm

- Not detachable foot-rest**
 (with DP=43 cm and P=40 cm)

 76°
 21 cm

- Detachable foot-rest**
 84° (std)
 76°

 (approx.measurements)

- Front Frame** ⑤
 STANDARD
 Y
 (only in case of not detachable foot-rest)

 V
 (only in case of not detachable foot-rest & without any automatic closure footplate)

- Separate aluminium profile tilt adjustable foot-plates** ⑧
 forward backward

 Foot-holding belts

- Closed carbon single foot-plate** ⑥

 Foot-holding belts

- Single aluminium profile tilt adjustable foot-plate** ⑨
 forward backward

 up & outward

 Foot-holding belts

- Automatic closure foot-plate in carbon** ⑦
 (note: up to seat width 46cm)

 Foot-holding belts

- Unica tubolare aperta in titanio** ⑩

 posizionata in avanti posizionata indietro(std)

- Side guards** ⑩
 Aluminium with carbon fibre wing

 Plastic

 Curved aluminium (same colour or black)

 Straight aluminium (same colour or black)

- Tip-up, detachable sport arm-rest h. 22 cm** ⑪

Elbow-rest
 Tubular
 Classic (23 cm long)

- Tip-up height adjustable from 22 to 28 cm "L" arm-rest** ⑫
 (detachable, open with sideguards)
 Not detachable

Elbow-rest
 Tubular
 Straight (26 cm long)
 Classic (23 cm long)
 Classic (30 cm long)

- Rear wheels** ⑬
 24" Ultralight (24 spokes) black
 24" Light (24 spokes)
 24" Star 6x3 (18 sps) silver or black
 24" (36 spokes)
 24" Mountain-bike CITYBIKE tyre
 24" Mountain-bike OFFROAD tyre
 24" Spinergy
 25" Spinergy
 25" Light (24 spokes) black
Tyres
 Pneumatic Marathon Plus
 Pneum. high press.plugged 24"
 Pneum. high press. smooth
 Solid 24"(not avail.with Ultralight)

- Pushrims** ⑭
 Aluminium silver
 Aluminium dark
 Chromium-plated steel 24"
 Rubber coated
 Titanium
 Carbolife CURVE L24**
 CL Curve L TetraGrip 24**
 CL Quadro rubber ctd 24**
 Carbolife GEKKO 24**
 Silicon covers
 * not suitable for wheels Star 6x3 and Mountain Bike



Dealer Name : _____
 Dealer Contact : _____
 Client Name : _____
 Scripting Date: ____/____/____
 Ship To : _____

Dealer



Order N° _____ Quotation
 Date _____ Signature _____
 Customer Ref. _____
 Funding: _____
 Email Quote To: _____

PAGE 2/2
 2020, January

ALHENA

Spoke guards (15)

- Transparent 24"
- Black 24"
- Alphabet 24"
- Fantasy 24"
- code pattern
- (see catalogue of spokeguards)

Front castors (16)

- 80 (3") solid
- 80 (3") solid with lights
- 100 (4"x1.1/4) solid plastic rim
- 100 (4"x1) solid with lights
- 100 (4"x1.1/4) solid with alum. rim
- 125 (5"x1.1/4) solid plastic rim
- 125 (5"x1.1/4) solid with alum. rim
- 150 (6") pneumatic
- 150 (6") solid

Revolving anti-tip device (17)

- Right
- Left




Unbalancing Pedal

- Right
- Left




Extended wheel plate (18)



(Not available with scissor brakes)


Back-rest pushing handles (19)

- Standard Without



- Height adjustable

Distance between hub centre and back-rest (20)



- 3,5 cm
- 6 cm (standard)**
- 8,5 cm
- (with HP=44 cm)

Anodized set (21)

(Rear wheel rims, rear wheel hubs, forks and fittings)

- Black
- Silver
- Light blue
- Red
- Orange
- Cyclamen light purple


(Light wheels only)

Lined cushion (22)
 in foam polyurethane




- 3 cm high
- 5 cm high

Pockets (24)



- Small under the seat



- On the back-rest

Wheel camber (25)

- 1°
- 2°
- 3°
- 4°

Brakes (23)

- Classic - short handle
- Classic - pull to brake short handle
- Classic - long handle
- Scissor
- Composite

Notes

Options

- 26 "M" velcro strip (hook) on seat
- 27 "F" velcro strip (loop) on seat
- 28 Seat/back-rest connection flap
- 29 Padded rigid cushion h 5
- 30 Chest harness
- 31 Chest belt
- 32 Abductor belt
- 33 Catheter holder pocket
- 34 Back-rest stretched bar
- 35 Back-rest anatomic board
- 36 Rx Lx Crutch hold./single
- 37 Rx Lx Crutch hold./double
- 38 Pump for pneumatics
- 39 Suitcase holder
- 40 45° pelvic belt
- 41 45° padded pelvic belt
- 42 Black backpack
- 43 Umbrella holder
- 44 Front protective covers

9,7 kg configuration

- Wheelchair 38x40x31 cm
- Nylon upholstery
- Frame colour: shiny titanium
- Automatic closure foot-rest
- Fixed back-rest pushing handles
- Aluminium sideguards with carbon fibre wings
- Scissor brakes
- Ultralight wheels
- Pneumatic high pressure smooth tyres
- Ultralight handrims
- 100 mm front castors
- Without pockets
- Max load: 100 kg

