

Dealer Name : _____
 Dealer Contact : _____
 Client Name : _____
 Scripting Date: ____/____/____
 Ship To : _____

Dealer



Order N° _____ Quotation
 Date _____ Signature _____
 Customer Ref. _____ User's weight Kg _____

Funding: _____
 Email Quote To : **PAGE 1/2**

2020, January


Key

standard

option

ALTHEA

L Seat width	<input type="checkbox"/> 34 <input type="checkbox"/> 36 <input type="checkbox"/> 38 <input type="checkbox"/> 40 <input type="checkbox"/> 42 <input type="checkbox"/> 44 <input type="checkbox"/> 46 <input type="checkbox"/> 48 <input type="checkbox"/> 50 <input type="radio"/> 52 <input type="radio"/> 56 <input type="radio"/> 60 (including eventual stretched bar, tension adj. upholstery & cover f/footplate according to setup)
P Seat depth Adjustable up to 6 cm(max. 50 cm)	<input type="checkbox"/> 36 <input type="checkbox"/> 38 <input type="checkbox"/> 40 <input type="checkbox"/> 42 <input type="checkbox"/> 44 <input type="checkbox"/> 46 <input type="radio"/> 48 <input type="radio"/> 50
HS Back-rest height	<input type="checkbox"/> 29 <input type="checkbox"/> 31 <input type="checkbox"/> 33 <input type="checkbox"/> 35 <input type="checkbox"/> 37 <input type="checkbox"/> 39 <input type="checkbox"/> 41 <input type="checkbox"/> 43 <input type="checkbox"/> 45 <input type="radio"/> 47 <input type="radio"/> 49 <input type="radio"/> 51 <input type="radio"/> 55 <input type="radio"/> 60 (stretched bar is included)
HA Front seat/floor height	<input type="checkbox"/> 42 <input type="checkbox"/> 43 <input type="checkbox"/> 44 <input type="checkbox"/> 46 <input type="checkbox"/> 48 <input type="checkbox"/> 50 <input type="checkbox"/> 52 <input type="radio"/> 54
HP Rear seat/floor height	<input type="checkbox"/> 38 <input type="checkbox"/> 40 <input type="checkbox"/> 42 <input type="checkbox"/> 44 <input type="checkbox"/> 46 <input type="checkbox"/> 48 <input type="checkbox"/> 50
DP Foot-rest/seat distance (from 17 to 32 cm foot-rest mounted on the frame, not possible with plastic footrests)	<input type="checkbox"/> 34 <input type="checkbox"/> 35 <input type="checkbox"/> 37 <input type="checkbox"/> 39 <input type="checkbox"/> 41 <input type="checkbox"/> 43 <input type="checkbox"/> 45 <input type="checkbox"/> 47 <input type="checkbox"/> 49 <input type="checkbox"/> 51

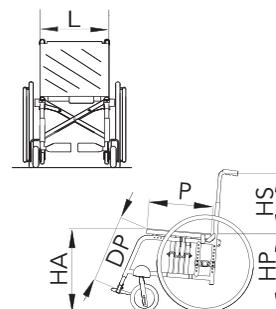

Frame colour ①
 Metallic blue Pearl red Metallic grey Matte black
 Pearl white Shiny black Neon green Neon orange
 (see "Colours" catalogue)

Upholstery ②
 Nylon (max up to L 50)
 Tension adj. nylon. back
 Tension adj. breath. back
 Without back-rest
 With divided seat (joint by velcro - std)
 With one entire seat (not depth adjustable)


Upholstery colour ③
 * (Coloured uphol. only with nylon)
 Black
 Red* Orange*
 Light blue* Green*
 Cornflower blue*

Not Detachable foot-rest ④

Detachable foot-rest 82° angle
(DP 41 cm) ④


Detachable foot-rest 68° angle
(DP 41 cm) ④

Elevating foot-rest (detachable) ④

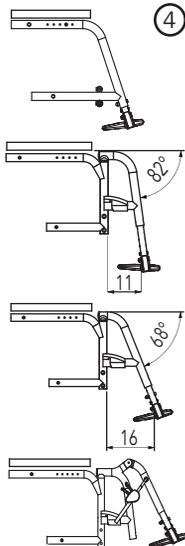

Plastic separate ⑤
(only L = from 34 to 56 cm)


Cover f/footplates *
 Foot-holding belts (L50max)
 Heel stops (L50max)
 (* eventually included f/L 52 to 60)



Separate aluminium profile tilt adjustable foot-plates: ⑥

forward backward


Foot-holding belts (L50max)

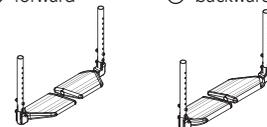

Single aluminium profile tilt adjustable foot-plate: ⑦
(not available with elevating foot-rest)


forward backward

Foot-holding belts
 Heel stops

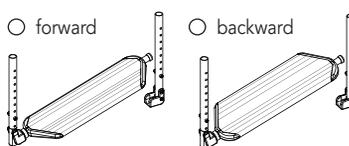

Automatic closure foot-plate in carbon ⑧
(not available with detachable or elevating foot-rest; only L= from 36 to 46 cm)

Foot-holding belts



Side guards ⑨

Plastic

Aluminium (same colour)



Detachable Desk arm-rest - h 22 cm tip-up ⑩

Open with side guards (only with HP > 42 cm)
 Closed
 27 cm high from the seat (compulsory for HP=42 & RW 24")

Elbow-rest

Classic (23 cm long)
 Straight (26 cm long)
 Tubular
 Hemiplegic RX
 Hemiplegic LX




Detachable Sport arm-rest - h 22 cm tip-up ⑪

Open with side guards (only with HP > 42 cm)
 Closed
 27 cm high from the seat (compulsory if HP=42 & RW 24")

Elbow-rest

Classic (23 cm long)
 Straight (26 cm long)
 Tubular
 Hemiplegic RX
 Hemiplegic LX




Detachable "U" arm-rest - h 22 cm tip-up ⑫

Open with side guards (only with HP > 42 cm)
 Closed
 27 cm high from the seat (compulsory if HP=42 & RW 24")

Elbow-rest

Straight (26 cm long)
 Straight (36 cm long)
 Tubular
 Hemiplegic RX
 Hemiplegic LX




Height adjustable tip-up arm-rest (only closed) ⑬

Desk model
 Sport model
 "U" model

Elbow-rest

Classic (30 cm long)
 Classic (36 cm long)
 Straight (26 cm long)
 Straight (36 cm long)
 Hemiplegic RX
 Hemiplegic LX

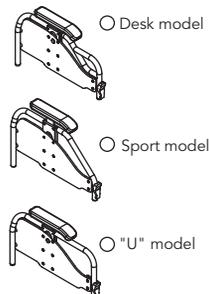

Dealer Name : _____
 Dealer Contact : _____
 Client Name : _____
 Scripting Date: ____/____/____
 Ship To : _____



Order N° _____ Quotation
 Date _____ Signature _____
 Customer Ref. _____

Funding: _____
 Email Quote To: _____
PAGE 2/2
 2020, January

ALTHEA

Dealer

Rear wheels (14)

- 24" 36 spokes 12" solid*
- 22" 36 spokes 12" pneumatic*
- 20" 36 spokes (N.A. if HP=42 if HP44; only curved rear frame)
- 24" MTB citybike tyre
- 24" MTB offroad tyre
- 24" Light (24 spokes)

- Tyres**
- Pneum. Plugged (x 1"3/8)
 - Pneum. high press. Plugged
 - Pneum. high press. Smooth
 - Solid
 - 24" Pneum. Marathon Plus

Pushrims (15)

- Aluminium silver
- Chromium-plated steel 24"
- Aluminium dark
- Rubber coated
- Carbolife CURVE L 24"(*)
- Carbolife GEKKO 24" (*)
- Silicon covers 24"

(*) not available with MTB wheels

Spoke guards (16)


- Transparent
 - Black
 - Alphabet
 - Fantasy
- code pattern:
 (see catalogue of spokeguards)

Front castors (17)


- 100 (4"x1.1/4) solid - plastic rim
- 100 (4"x1.1/4) solid - alum. rim
- 125 (5"x1.1/4) solid - plastic rim
- 125 (5"x1.1/4) solid - alum. rim
- 150 (6") pneumatic
- 150 (6") solid
- 175 (7") solid
- 175 (7") pneumatic

Rear frame


- With small wheels for narrow passages - standard



- Without small wheels for narrow passages




- Small wheels for narrow passages with lever € 111,00



(Only if rear seat/floor height HP is between 44 and 48 cm)

- Curved rear frame



(It is not possible to assemble the small wheels for narrow passages)

Unbalancing system (18)

- Right Right
 - Left Left
- (Only with straight rear frame) (Only with curved rear frame)

Anti-tip device (Only with straight rear frame)

- Right
- Left

Revolving anti-tip device (Only with curved rear frame)


- Right
- Left

Single drive (20)

- Right
- Left




Extended wheel plate (21)




Pushing handles (22)

- Standard Height adjustable(*) Hinged back-rest(*) (no stretched bar)



(*) tension adj. upholstery is compulsory



Distance between the hub centre and back-rest (23)


- 2 cm (ext. wheel plate)
- 3,5 cm
- 5,5 cm
- 7,5 cm



(with HP=44 cm)

Adjustable swing away Lateral supports (23)


- Right
 - Left
- Specify the height "h"



..... cm


Head-rest (24)

Padded



- Fixed
- Height adjustable

Moulded



- Fixed
- Height adjustable

Orbital



- Moulded Anatomic

Specify "h" & "d" where requested
 Standard: h = 20 cm d = 15 cm

h = cm d = cm

Table (25)

- Transparent
- Rx OLx Hemiplegic transp.
- Plastic grey
- Soft padded

Specify the fastening:
 single double



(Only with arm-rest) OXL if L>50cm

Lined cushion in foam polyurethane (28)



- 3 cm high
- 5 cm high


Brakes (26)

- Classic - short handle
- Classic - long handle
- Drum
- Right single brake
- Left single brake
- Drum+classic

Options

- 34 "M" velcro strip (hook) on seat
- 35 "F" velcro strip (loop) on seat
- 36 Seat/back-rest connection flap
- 37 Chest harness
- 38 Chest belt
- 39 Abductor belt
- 40 Front protective covers
- 41 Stretched bar
- 42 WC seat
- 43 Catheter holder pocket
- 44 Umbrella holder

Abductor (27)



- 1 3 5 7 cm

..... cm
 Choose or specify the height from seat cover

Options

- 45 R OL Crutch hold./single
- 46 R OL Crutch hold./double
- 47 Pump for pneumatics
- 48 Suitcase holder
- 49 45° pelvic belt
- 50 45° padded pelvic belt
- 51 Black backpack
- 52 IV bar + poles
- 53 IV poles
- 54 Padded rigid cushion (L52max)
- 55 Padded rigid cushion (L56-60)

