

Dealer Name : _____
Dealer Contact : _____
Client Name : _____
Scripting Date: ____/____/____
Ship To : _____

Dealer

☐ Order N° _____ ☐ Quotation
Date _____ Signature _____
Customer Ref. _____ User's weight Kg _____
Funding: _____
Email Quote To: _____

PAGE 1/2

2020, January

Key


☐ standard

☐ option

FENICE

- L** Seat width ☐ 34 ☐ 36 ☐ 38 ☐ 40 ☐ 42 ☐ 44
P Seat depth ☐ 36 ☐ 38 ☐ 40 ☐ 42 ☐ 44
HS Back-rest height ☐ 27 ☐ 29 ☐ 31 ☐ 33 ☐ 35 ☐ 37 ☐ 39
HA Front seat/floor height ☐ 46 ☐ 48 ☐ 50
HP Rear seat/floor height ☐ 40 ☐ 42 ☐ 44 ☐ 46
DP Foot-rest/seat distance ☐ 35 ☐ 37 ☐ 39 ☐ 41 ☐ 43 ☐ 45 ☐ 47 ☐ 49

cm

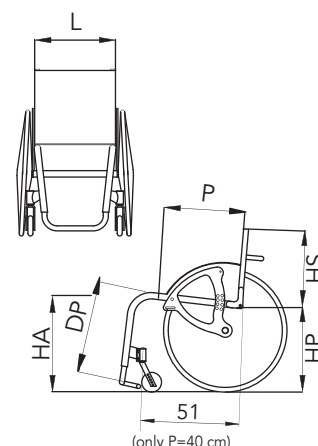

Colore telaio

- ☐ Metallic grey ☐ Pearl white ☐ Metallic light blue
☐ Glossy black ☐ Matt black
☐ ----- (see "Colours" catalogue)
☐ Neon green ☐ Neon orange

①

Upholstery

- ☐ Tension adjustable nylon backrest
☐ Tension adj. breathable backrest
☐ Without back-rest for seating system:
☐ **FAMEKH** (separate order form)
☐ other seating system: _____

②

Single tubular foot-plate & Front frame


(**) height adjustable only with Y shaped or straight front frame

☐ Open (**)

☐ Carbon fibre closed (**)


☐ Tilt adjustable carbon fibre closed (with with Y or V shaped front frame)

☐ Standard footrest colour: same as frame colour



③


Pushing handles

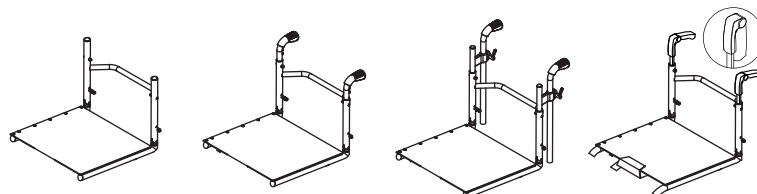

- ☐ Without any pushing handles ☐ Standard pushing handles ☐ Height adj. pushing handles ☐ Foldable pushing handles

④


Distance between the hub centre and back-rest



- ☐ 7 cm ☐ 13 cm
☐ 9 cm (standard) ☐ 15 cm
☐ 11 cm

⑤


Back-rest tilt



- ☐ 89°
☐ 91° (standard)
☐ 93°

⑥

Front opening angle



- ☐ 90° (standard) (A = 16 cm)
☐ 95° (A = 22 cm)

(approximate standard measures)


⑦

Rear wheel camber

- ☐ 1° ☐ 2°
☐ 3° ☐ 4°

⑧

Side guards



- ☐ Carbon fibre ☐ Plastic

⑨

"L" arm-rest, detachable, h 22cm




Elbow-rest

- ☐ Tubular
☐ Straight (26 cm long)
☐ Classic (23 cm long)
☐ Classic (30 cm long)

⑩


Brakes



- ☐ Standard
☐ Composite
☐ Scissor brakes

⑪

Revolving anti tip device



- ☐ Right
☐ Left

⑫

Notes

Dealer Name : _____
Dealer Contact : _____
Client Name : _____
Scripting Date: ____ / ____ / ____
Ship To : _____

Dealer

☐ Order N° _____ ☐ Quotation

Date _____ Signature _____

Customer Ref. _____

Funding: _____

Email Quote To : _____

2020, January

FENICE

Rear wheels

13

- ☐ 24" Ultralight (24 spokes)
- ☐ 24" Light (24 spokes)
- ☐ 24" Star 6x3 (18 spokes, silver or black)
- ☐ 24" (36 spokes)
- ☐ 24" Mountain-bike with Citybike tyre
- ☐ 24" Mountain-bike with Offroad tyre
- ☐ 24" Spinergy
spokes colour.....(black stand.)
- ☐ 25" Spinergy
spokes colour.....(black stand.)
- ☐ 25" Light (24 spokes) black

Tyres

- ☐ Pneum. Marathon Plus
- ☐ Pneum. high pressure Smooth
- ☐ Pneum. high pressure Plugged 24"
- ☐ Pn.Schwalbe Right Run 24"
- ☐ Solid 24" not available for Ultralight wheels

Pushrims

14

- ☐ Aluminium silver
- ☐ Aluminium dark
- ☐ Chromium-plated steel 24"
- ☐ Rubber coated
- ☐ Titanium
- ☐ CarboLife CURVE L 24" *
- ☐ CL Curve L TetraGrip 24" *
- ☐ CL Quadro rubber ctd 24" *
- ☐ CarboLife GEKKO 24" *
- ☐ Silicon covers 24"

* not suitable for Star 6x3 and Mountainbike wheels

Spoke guards

15

- ☐ Transparent 24"
- ☐ Black 24"
- ☐ Alphabet 24"
- ☐ Fantasy
code pattern
(see catalogue of spokeguards)

Front castors


16

- ☐ 80 (3") solid
- ☐ 80 (3") solid with lights
- ☐ 100 (4"x1.1/4) solid with plastic rim
- ☐ 100 (4"x1) solid with lights
- ☐ 100 (4"x1.1/4) solid with alum. rim
- ☐ 125 (5"x1.1/4) solid with plastic rim
- ☐ 125 (5"x1.1/4) solid with alum. rim
- ☐ 125 (5"x1) solid with lights
- ☐ 150 (6") pneumatic
- ☐ 150 (6") solid

Backrest bar

17


- ☐ Standard:
P(bar) 7,5cm;
H(bar) 19cm;
dia 19mm.




- ☐ Custom:
P.....cm;
H.....cm;
dia.....mm.

Pockets


18



- ☐ Small under the seat



- ☐ Big under the seat



- ☐ On the back-rest

Lined cushion

in foam polyurethane

19



- ☐ 3 cm high
- ☐ 5 cm high

Anodized set

(Rear wheel rims & hubs if LIGHT 24", sideguard supports, forks and fittings)

20

- ☐ Black
- ☐ Silver
- ☐ Light blue
- ☐ Red
- ☐ Orange
- ☐ Cyclamen light purple

(only 24" Light wheels)

Options

- 21 ☐ "M+F" velcro strips (hook and loop) on seat
- 22 ☐ "M" velcro strips (hook) on seat
- 23 ☐ "F" velcro strips (loop) on seat
- 24 ☐ Padded rigid seat h 5
- 25 ☐ Chest harness
- 26 ☐ Chest belt
- 27 ☐ Abductor belt
- 28 ☐ Catheter holder pocket
- 29 ☐ Rx ☐ Lx Crutch holder
- 30 ☐ Pump for pneumatics
- 31 ☐ Suitcase holder
- 32 ☐ 45° pelvic belt
- 33 ☐ 45° padded pelvic belt
- 34 ☐ Black backpack
- 35 ☐ Umbrella holder
- 36 ☐ Front protective covers

Notes