

Dealer Name : _____
Dealer Contact : _____
Client Name : _____
Scripting Date: ____/____/____
Ship To : _____

Dealer

☐ Order N° _____ ☐ Quotation
Date _____ Signature _____
Customer Ref. _____ User's weight Kg _____
Funding: _____
Email Quote To: _____

PAGE 1/2

2020, January

Key

☐ standard


☐ option

IDRA2.0

☐ IDRA2.0 FIX

☐ IDRA 2.0 ADJ

L Seat width ☐ 34 ☐ 36 ☐ 38 ☐ 40 ☐ 42 ☐ 44
P Seat depth ☐ 36 ☐ 38 ☐ 40 ☐ 42 ☐ 44 ☐ 46
HS Back-rest height ☐ 27 ☐ 29 ☐ 31 ☐ 33 ☐ 35 ☐ 37 ☐ 39 ☐ 41
HA Front seat/floor height ☐ 46 ☐ 48 ☐ 50
HP Rear seat/floor height ☐ 40 ☐ 42 ☐ 44 ☐ 46 ☐ 48
DP Foot-rest/seat distance ☐ 37 ☐ 39 ☐ 41 ☐ 43 ☐ 45 ☐ 47 ☐ 49 cm

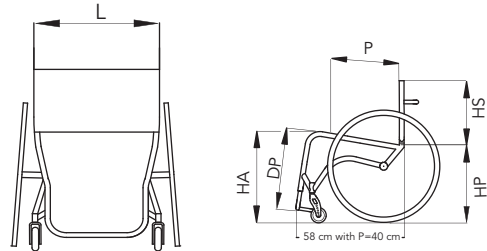

Frame colour

①

☐ Glossy black ☐ Matt black
☐ Pearl white ☐ Pearl red
☐ Glossy anthracite
☐ (see "Colours" catalogue)
☐ Neon green ☐ Neon orange

Upholstery

②

Back-rest:

☐ Tension adj nylon
☐ Breathable tension adj
☐ Without back-rest:
☐ **FAMEKH** (separate order form)
☐ other seating system.....

Seat:

☐ Fix (standard, screws)
☐ Tension adj. (velcro)


Upholstery colour

③

☐ Black
☐ Coloured (nylon).....
colours: orange, red, green, cornflower, light blue
☐ Coloured (breathable).....
colours: red, dry green, grey

Single tubular foot-plate


④

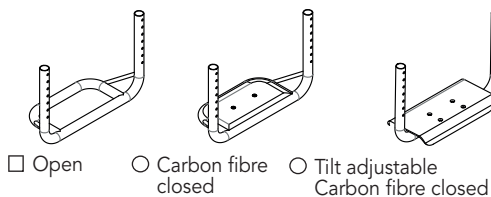

☐ Open ☐ Carbon fibre closed ☐ Tilt adjustable Carbon fibre closed

Pushing handles


⑤

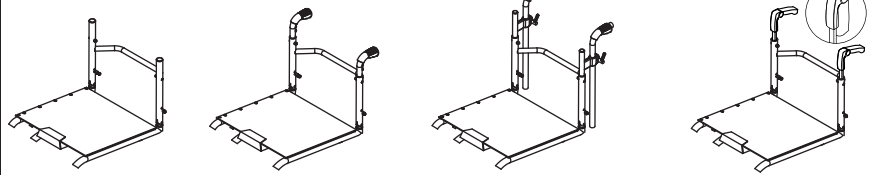

☐ Without pushing handles ☐ Fixed pushing handles ☐ Height adjustable pushing handles ☐ Foldable pushing handles

Distance between the hub centre and back-rest


⑥



☐ 9 cm (standard) ☐ 7 cm
☐ 0 cm (biamputated) ☐ 11 cm
☐ 3 cm ☐ 13 cm
☐ 5 cm

Back-rest tilt


⑦



☐ 89°
☐ 91° (standard)
☐ 93°

Front frame angle

⑧



☐ 83° (standard) (A = 16 cm)
☐ 75° (A = 21 cm)

Rear wheel camber

⑨

☐ 1° ☐ 2°
☐ 3° ☐ 4°


Side guards

⑩



☐ Aluminium with carbon fibre wing

☐ Detachable



☐ Aluminium with straight carbon fibre

☐ Detachable

☐ Height adjustable from 22 to 28cm "L" arm-rest, detachable and tip-up

⑪



Elbow-rest

☐ Tubular
☐ Straight (26 cm long)
☐ Classic (23 cm long)
☐ Classic (30 cm long)

Brakes

⑫




☐ Scissor brake
☐ Composite

☐ Standard
☐ Pull brake



Revolving anti-tip device

⑬



☐ Right
☐ Left

Notes

Dealer Name : _____
Dealer Contact : _____
Client Name : _____
Scripting Date: ____ / ____ / ____
Ship To : _____

☐ Order N° _____ ☐ Quotation

Date _____ Signature _____

Customer Ref. _____

Funding: _____

Email Quote To : _____

2020, January

IDRA2.0

Dealer

Rear wheels

14

- ☐ 24" Ultralight(24 spokes)
☐ 24" Light(24 spokes)
☐ 24" Star 6x3 (18 spokes, silver or black)
☐ 24" (36 spokes)
☐ 24" Mountain-bike with Citybike tyre
☐ 24" Mountain-bike with Offroad tyre
☐ 24" Spinergy
spokes colour.....(black stand.)
☐ 25" Spinergy
spokes colour.....(black stand.)
☐ 25" Light (24 spokes) black

Tyres

- ☐ Pneum. Marathon Plus
☐ Pneum. high pressure Smooth
☐ Pneum. high pressure Plugged 24"
☐ Pn.Schwalbe Right Run 24"
☐ Solid 24" not available for Ultralight wheels

Pushrims

15

- ☐ Aluminium silver
☐ Aluminium dark
☐ Chromium-plated steel 24"
☐ Rubber coated
☐ Titanium
☐ CarboLife CURVE L 24" *
☐ CL Curve L TetraGrip 24" *
☐ CL Quadro rubber ctd 24" *
☐ CarboLife GEKKO 24" *
☐ Silicon covers 24"

* not suitable for Star 6x3 and Mountainbike wheels

Spoke guards

16

- ☐ Transparent 24"
☐ Black 24"
☐ Alphabet 24"
☐ Fantasy
code pattern
(see catalogue of spokeguards)

Lined cushion in foam polyurethan

18



- ☐ 3 cm high
☐ 5 cm high


Front castors

17

- ☐ 80 (3") solid
☐ 80 (3") solid with lights
☐ 100 (4"x1.1/4) solid with plastic rim
☐ 100 (4"x1) solid with lights
☐ 100 (4"x1.1/4) solid with alum. rim
☐ 125 (5"x1.1/4) solid with plastic rim
☐ 125 (5"x1.1/4) solid with alum. rim
☐ 125 (5"x1) solid with lights
☐ 150 (6") pneumatic
☐ 150 (6") solid


Pockets

19



- ☐ Small under the fix seat

or



- ☐ Small hanging from the seat



- ☐ Big under the seat



- ☐ On the back-rest

Anodized set

(Rear wheel rims & hubs if LIGHT 24", sideguard supports, forks and fittings)


20

- ☐ Black
☐ Silver
☐ Light blue
☐ Red
☐ Orange
☐ Cyclamen light purple

(only 24" Light wheels)

Backrest bar

21




- ☐ Standard:
P(bar) 7,5cm;
H(bar) 19cm;
dia 19mm.
☐ Custom:
P.....cm;
H.....cm;
dia.....mm.


Options

- 23 ☐ "M+F" velcro strips (hook and loop) on seat
24 ☐ "M" velcro strips (hook) on seat
25 ☐ "F" velcro strips (loop) on seat
26 ☐ Padded rigid seat h 5
27 ☐ Chest harness
28 ☐ Chest belt
29 ☐ Abductor belt
30 ☐ Catheter holder pocket
31 ☐ Rx ☐ Lx Crutch holder
32 ☐ Pump for pneumatics
33 ☐ Suitcase holder
34 ☐ 45° pelvic belt
35 ☐ 45° padded pelvic belt
36 ☐ Black backpack
37 ☐ Umbrella holder
38 ☐ Front protective covers

STANDARD SEAT



"Y" SHAPED FRONT FRAME (standard)




☐ Custom front opening
.....cm

ERGO SEAT




"V" SHAPED FRONT FRAME



(The tilt adjustable footplate only is suitable with the "V" shaped front frame)

STRAIGHT FRONT FRAME



(Standard front frame for seat width of 34cm)

Notes